

品德博得信任
质量铸就品牌
服务赢占市场



资格证明文件

河北德林机械有限公司

地址：河北省石家庄市元氏大街271号

邮编：051130

电话：0086-311-86481688 / 86481658 传真：0086-311-86481668

电子邮箱：info@delinco.com, sales@delinco.com

网址：www.delinco.com

河北德林机械有限公司
Hebei Delin Machinery Co.,Ltd.

检测设备 Checkout Equipment



冲击测试仪器
Impact Testing Apparatus



万能强度测试仪
Universal Strength Tester



碳硫联测分析
Carbon Sulfur Measurement Analysis



电磁微震筛砂机
Electromagnetic Micro Seismic Sand Screen



拉力测试仪
Tensile Tester



光谱分析仪
Spectrum Analyzer

部分生产设备 Partial Production Equipment



4M 龙门铣
Gantry Milling Machine



6.3M 立车
Vertical Lathe



普车
Center Lathe



20T 移动混砂机
Portable Muller



砂处理设备
Sand Preparation Equipment



1.5T、3T、10T 熔炼炉
Smelting Furnace



5x4.5x1.6M 热处理炉
Thermal Treatment Furnace



1T、5T 抛丸清理机
Aerator

部分备件 Partial Spare Parts



OEM泵体
Casing



OEM泵体
Casing



250X200DH-ST渣浆泵减压盖
Expeller Ring



150X100DH-D渣浆泵泵盖
Cover



150X100DH (R)-D渣浆泵橡胶护套
Rubber Liner



150X100DH (R)-D 渣浆泵橡胶前护板
Rubber Former Liner



600DSC (R) 脱硫泵叶轮
FGD Pump Impeller



DG600X450MS挖泥泵叶轮
Dredge Pump Impeller

D G 系列 挖 泥 泵

DG Type Dredge Pump



(托架式)
Self-bracket Type



(箱体合一式)
Gear box with pump together

口径/Diameter :100 ~ 12000mm


流量/Capacity : 60 ~ 30000m³/h

扬程/Head :10 ~ 120m

DG 400 X 350 H - TU



DG 800 X 700 L (M S)

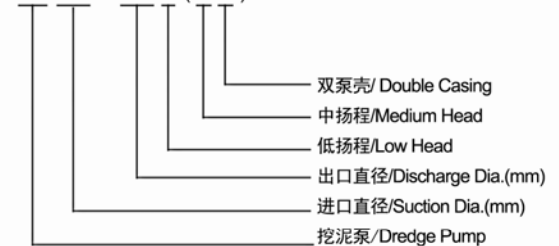

产品特点：该系列泵为单级单吸悬臂卧式结构，根据排出压力的大小挖泥泵的结构分为两种结构：单泵壳与双泵壳；按传动方式可分为两种典型结构：自带托架式与泵箱合一式（即齿轮箱、泵合为一体）。自带托架式润滑方式有两种：脂润滑或稀油润滑。

This type of pump is a single stage, single suction, cantilever, horizontal structure. The dredge pump structure is divided into two kinds of structures according to the size of pressure discharging, i.e. single and double pump casing; According to the driving type, it can be divided into two kinds of typical structures, one type is with self-bracket, another type is pump and gearbox together (i.e., gear box, motor as a whole). Self-bracket type lubrication type has two types of lubrication, grease and oil lubrication.

Type	Flow Rate	Head	Speed	Max Efficiency	NPSH	Inlet Diameter	Outlet Diameter	Max. Particle Size	Weight
	M3/h	m	R/min.	%	m	(mm)	(mm)	(mm)	(kg)
DG150×100-D	36-252	3.5-51	600-1400	30-50	2.5-3.5	150	100	82	460
DG200×150-E	137-576	10-48	800-1400	50-60	3-4.5	200	150	127	1120
DG250×200-S	216-979	13-50	500-1000	45-65	3-7.5	250	200	178	2285
DG300×250-G	360-1512	11-58	400-850	50-70	2-4.5	300	250	220	4450
DG350×300-G	504-3168	6-66	300-700	60-68	2-8	350	300	240	5400
DG450×400-T	864-3816	9-48	250-500	60-72	3-6	450	400	254	10800
DG250×200H-S	396-1296	10-80	500-950	60-72	2-5	250	200	180	3188
DG300×400H-T	612-2232	28-78	350-700	60-72	2-8	300	250	210	4638
DG400×350H-TU	720-3600	20-72	300-500	60-72	3-6	400	350	230	12250
DG250X200L	340-870	10-45	900	65-70	<4	250	200	178	2500
DG250X200MS	520-1000	38-65	850	70-74	<4	250	200	180	3000
DG300X250L	500-950	10-42	700	65-68	<4	300	250	220	3000
DG350X300L	700-2400	10-38	650	74-78	<4	350	300	241	6000
DG350X250M	500-1500	35-68	600	74-78	<4	350	250	220	3513
DG450X300M	900-2500	40-70	550	76-80	<4	450	300	241	3513
DG450X350M	1200-3500	40-70	550	71-75	<4	450	350	245	7300
DG500X450L	1200-3800	10-43	48	78-80	<4	500	450	354	7850
DG600X450MS	1500-4200	40-76	500	80	<4	600	450	354	7950
DG650X550L	1800-5500	10-48	420	83	<4	650	550	300	8000
DG650X500MS	2000-6000	35-73	440	85	<4	650	550	250	11300
DG700X600MS	2500-8000	30-76	470	85	<4	700	600	220	30000
DG760X700MS	2800-10000	30-76	380	81	<4	760	700	280	45000
DG800X700L	3000-8500	10-43	380	81	<4	800	700	280	23000

DG800X750MS	5500-14000	34-74	349	81	<4	800	750	290	55000
DG900X800L	4000-13000	10-40	280	85	<4	900	800	300	23000
DG900X850MS	7000-17000	34-74	330	85	<4	900	850	320	65000
DG1000X900MS	8000-20000	34-74	175	85	<4	1000	900	340	80000
DG1050X950L	7500-17000	10-38	258	85	<4	1050	950	345	95000
DG1200X1000MS	8000-28000	24-75	290	85-87	<4	1200	1000	350	121000